

Fogger Single Cycle Controller - 180CFM

MODEL # 950800

OVERVIEW

When activated, the Fogger Single Cycle Controller starts fogger operation immediately and runs for a predetermined period of time — up to 2.84 hours — then switches off. The run time is set by selecting toggle switches that total the number of seconds of desired application time.

• *NOTE: The total air CFM requirement of all the foggers connected to this controller must be less than 180 CFM, which is the air CFM capacity of the controller's 1/2 inch solenoid. (For a higher capacity of up to 460 CFM see controller model #950802.)*

Key Features

- Controls any combination of 8-Way, 4-Way and 2-Way Pump Fed Foggers
- The number of foggers that can be supported depends on the combined air CFM requirements of the foggers, not to exceed 180 CFM total.*
- Timer allows for run times from several seconds to 2.84 hours (10,230 seconds)
- Lockable, chemical resistant controller box
- Brass air solenoid
- On/Off switch with green, lighted "on" indicator
- Visit www.laffertyequipment.com/tools/fogger/index.php to use our handy fogger planning tool
- *(For a higher air capacity of up to 460 CFM, see controller model #950802.)

Includes

- NEMA rated control box (120V)
- Single Cycle Timer
- Electric-activated 1/2" air solenoid, 180 CFM capacity


Basics of Selecting a Fogger Controller

- Select the type and number of foggers for the intended application
- Add up the total CFM required for the selected foggers
- The total CFM will determine what size solenoid is required:
 - 1/2 inch for up to 180 CFM;
 - 3/4 inch for 181 to 460 CFM
- Select the controller that matches the total CFM requirements and has the functionality required for the application



REQUIREMENTS

Electric	120V / 2 Amps
Compressed Air	Up to 180 CFM

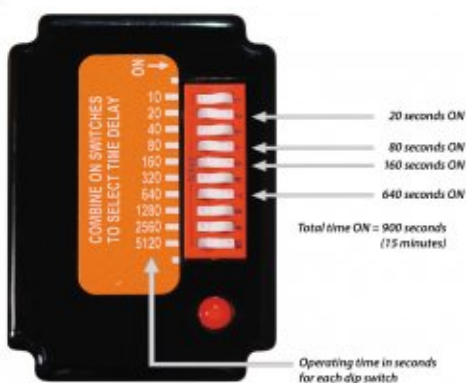

Lafferty
EQUIPMENT MANUFACTURING INC.

1.501.851.2820 or 1.800.999.2820
laffertyequipment.com