

Timed Dual Entryway Foam Sanitizer

MODEL # 976505

OVERVIEW

The Timed Dual Entryway Foam Sanitizer is an automated foam applicator for projecting sanitizing chemicals on to floors of two adjacent 3' wide employee walk doors to prevent cross contamination. When activated, this venturi injection system uses city water pressure (35 - 125 PSI) to draw and blend chemical concentrate into the water stream to create an accurately diluted solution. Rich, clinging foam is created by injecting compressed air into the solution to greatly increase volume and coverage ability. Foam is then projected through the discharge hoses and Spreader™ nozzles. The system timer is user-programmable to meet the needs of any facility.

Key Features

- Applies a layer of rich, clinging foam to entryway floors to prevent cross-contamination
- Designed for two adjacent 3' wide employee walk doors
- Dilutes chemical concentrate "on-the-fly" from a container near the unit
- The unique Spreader™ nozzle lays a foam pattern 3' across and 4' wide to ensure all foot traffic and cart wheels are fully exposed to the sanitizer
- Automatic activation and shutoff for use in moderate to high traffic areas
- Adjustable timer controls the application of foam at regular intervals - up to 1 minute foaming and up to 1 hour off
- Adjustable foam consistency (wet/dry)
- Chemical resistant wetted components ensure durability and years of reliable service with minimal maintenance
- Available for 24VAC electric (#976505-24V)
- See [Catalog 6](#) for other entryway configurations

Includes

- Stainless steel mounting plate
- NEMA rated control box with run/delay timer
- Water activation solenoid
- (2) Machined polypropylene foamer bodies
- 20 color-coded precision metering tips to set dilution ratios
- (2) Foam enhancers
- (2) 10' discharge hoses
- (2) Entryway Spreader™ nozzles (one for each door)

OPTIONS

Stainless Steel Jug Racks

2 ½ Gallon (8 ½" x 10 ½")	# 224210
5 Gallon Round/Square Locking (12" x 12")	# 224214
5 Gallon Round/Square (12" x 12")	# 224215

Control Box Upgrades (Specify at Time of Purchase)


Photocell Activation Upgrade	# 976001EE
Push Button Activation Upgrade	# 976001PB

Dual Pick-up Assembly

Entryway Dual Chemical Pick-up Assembly	# 976012
---	----------

Alternate Chemical Check Valve - Viton Standard

Check Valve, Chemical, PP(W), 1/4" (EPDM)	# 491401
---	----------

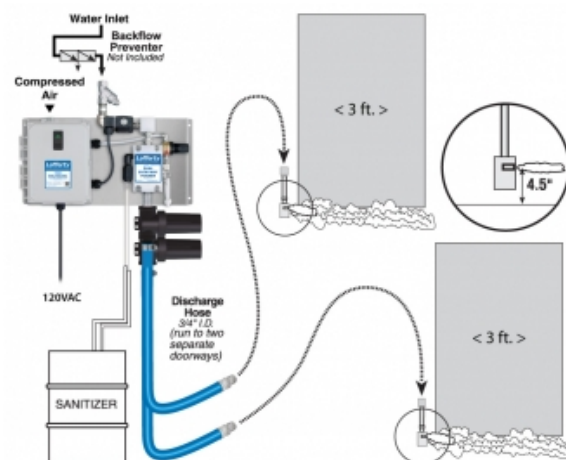

REQUIREMENTS

Chemical Concentrate

Water

Temperature	up to 160°F
Pressure	35-125 PSI
Flow	2.68 GPM @ 40 PSI
Supply Line	1/2" Minimum

Compressed Air

up to 4 CFM

Hose/Pipe

3/4" ID x 10'

Nozzle

2 Entryway Spreader (1 for each door)

Electric

120V

Dilution Ratio Range

306:1 to 6:1 @ 40 PSI

APPLICATIONS

- Agriculture/Horticulture
- Animal Health
- Dairy
- Food & Beverage
- Hatchery
- School Hygiene
- Pharm/Bio

Lafferty
EQUIPMENT MANUFACTURING LLC

1.501.851.2820 | 1.800.999.2820
www.laffertyequipment.com