

Portable 5 Gallon Conveyor-Mate™ LC / LC Foam System

MODEL # 975932

OVERVIEW

The LC/LC Conveyor-Mate™ is a portable foaming system designed specifically for Clean-In-Place foaming on to conveyor belts up to 48" wide. This venturi dilution system uses city water pressure (35 - 125 PSI) to accurately draw and blend chemical concentrate into the water stream. Compressed air is added to create rich clinging foam. Dual foamer bodies operate independently for one side only or simultaneously for the top and underside. Fully adjustable foam arms extend vertically and horizontally to virtually any position. The unique stainless steel Spreader Nozzles™ create a wide foam pattern that can be adjusted and rotated to ensure optimal coverage at any angle.

Key Features

- Fully-adjustable foam arms accommodate many conveyor belt positions — horizontal, vertical, angled, side-by-side, etc.
- Unique Spreader Nozzles™ project a wide foam pattern
 - 12" overhead distance = 30" wide coverage
 - 24" overhead distance = 48" wide coverage
- Each Spreader Nozzle™ can also be rotated 360° to project foam at any angle for wider coverage or to foam hard-to-reach locations
- Foam arms can run independently or simultaneously to foam one or both sides of a conveyor belt
- Projects rich, clinging foam which increases chemical contact time and effectiveness
- Foaming expands the chemical and discourages over-application by providing visual assurance of coverage
- Adjustable foam consistency (wet/dry)
- Dilution ratio for each foam arm is set independently with precision metering tips
- Water and air pressure gauges eliminate guessing to reduce set-up time and help with troubleshooting
- Machined stainless steel and polypropylene components ensure durability and years of outstanding performance
- Industrial-strength design holds up in tough environments
- Available with lower flow rate for slower and/or narrower belts
- Lafferty also manufactures fixed-location foam bars for situations where portability is not required
- See other Lafferty city water pressure foamers in [Catalog 1](#)

Includes

- All stainless steel 4-wheel cart with 5 gallon jug rack
- Non-marking tires with locking stainless steel swivel casters
- Easy-to-read pressure gauges for incoming water and air
- (2) Machined polypropylene foamer bodies
- (2) 20 color-coded metering tips for setting dilution ratios
- (2) 5' hoses to connect foamer bodies to foam arms
- (2) Stainless steel extension arms with Spreader Nozzles™
- Color-coded ball valves and hoses for each foam arm

OPTIONS


Square Jug Rack Conversion

Specify Round or Square Jug Racks at time of order

Alternate Check Valves - EPDM Standard

Check Valve, Chemical, SS, Viton, 1/4" # 491324-V

Check Valve, Air, SS, 1/4" MM (Viton / Hast) # 491306

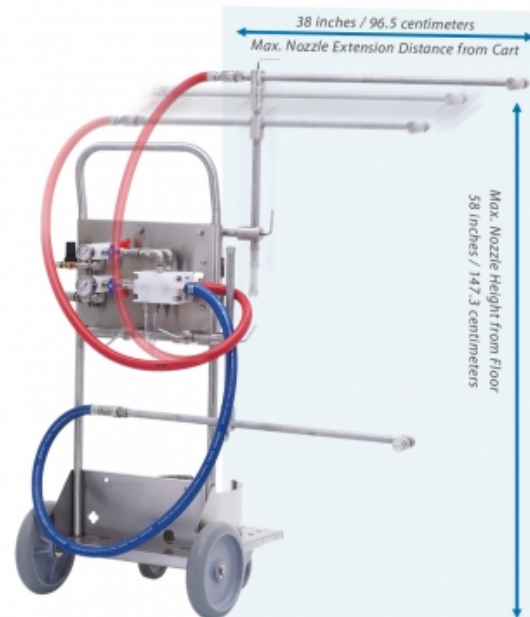

REQUIREMENTS

Chemical Concentrate

Water

Temperature	up to 160°F
Pressure	35 to 125 PSI
Flow	1.34 GPM @ 40 PSI
Supply Line	1/2"

Compressed Air

up to 3 CFM

Nozzle

200 Spreader

Hose

3/4" ID x 5'

Requirements shown are **per foam bar**

Dilution Ratio Range 306:1 to 6:1 @ 40 PSI

APPLICATIONS

- ALL TYPES OF CONVEYOR FOAMING / CLEANING:
- Food & Beverage
- Agriculture/Horticulture
- Dairy
- Industrial
- Paper Mill
- Pharm/Bio

Lafferty
EQUIPMENT MANUFACTURING LLC
CFS TECHNOLOGIES

1.501.851.2820 | 1.800.999.2820
www.laffertyequipment.com