

Timed PF Entryway MV Foam Sanitizer - 24VAC

MODEL # 976256-24V

OVERVIEW

The Timed PF Entryway MV Foam Sanitizer is an automated foam applicator for projecting sanitizing chemicals on to floors of 6' wide double doors to prevent cross contamination. This system receives ready-to-use chemical from a user-supplied central chemical feed system. Rich, clinging foam is created by injecting compressed air into the solution to greatly increase volume and coverage ability. Foam is then projected through the discharge hose and Spreader™ nozzle. The system timer is user-programmable to meet the needs of any facility. This unit requires 24VAC electrical input - a locally sourced standard step-down transformer is required.

Key Features

- Applies a layer of rich, clinging foam to entryway floors to prevent cross-contamination
- Designed for 6' wide double doors
- Receives pre-diluted chemical solution from a user-supplied central chemical feed system
- The unique MV Spreader™ nozzle lays a foam pattern 6' across and 6' wide to ensure all foot traffic and cart wheels are fully exposed to the sanitizer
- Automatic activation and shutoff for use in moderate to high traffic areas
- Adjustable timer controls the application of foam at regular intervals - up to 1 minute foaming and up to 1 hour off
- Adjustable foam consistency (wet/dry)
- Chemical resistant wetted components ensure durability and years of reliable service with minimal maintenance
- Available for smaller & larger doors (#976250-24V, 976260-24V)
- Available for 120VAC electric (#976250)
- See [Catalog 6](#) for other entryway configurations

Includes

- Stainless steel mounting plate
- 24VAC NEMA rated control box with run/delay timer
- Solution activation solenoid
- Machined polypropylene pump-fed foamer body
- Foam enhancer
- 10' discharge hose
- MV Entryway Spreader™ nozzle

OPTIONS

Central Pump Systems (AODD)


Mini-Central Pump System (1/2" PP)	# 919050
Central Pump System (1" SS)	# 919060SS

Level Masters Provide an Automatic Supply of Ready-to-Use Chemical

Level Master (Various Tank Sizes)	# 989304
Gemini Level Master (Various Tank Sizes)	# 989316

High Flow Level Masters Provide an Automatic Supply of Ready-to-Use Chemical

60/10 High Flow Level Master	# 989106
60/20 High Flow Level Master	# 989108

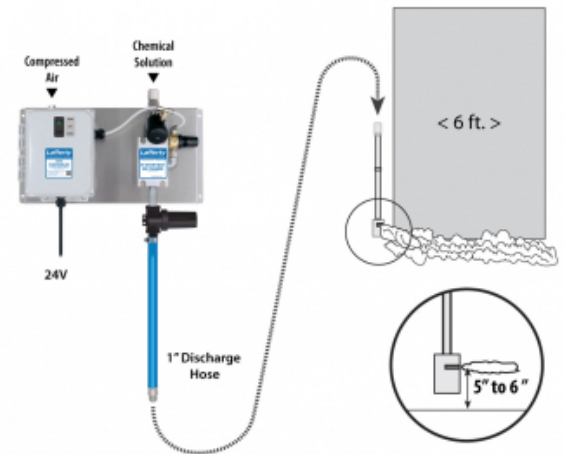

REQUIREMENTS

Ready-to-Use Chemical Solution

Temperature	up to 160°F
Pressure	35 to 75 PSI
Flow	2.45 GPM @ 40 PSI
Supply Line	1/2"

Compressed Air

up to 3 CFM

Hose

1" ID x 25'

Nozzle

MV Entryway Spreader

Electric

24V

APPLICATIONS

- Agriculture/Horticulture
- Animal Health
- Dairy
- Food & Beverage
- Hatchery
- School Hygiene
- Pharm/Bio
- And Many Other Applications!