DART™ EP-LM Spray System With 20 Gallon Level Master™

MODEL # 977886-20

OVERVIEW


The *DART*™ EP-LM Spray System is a push button activated, time delayed, asphalt release applicator that mounts to a user-supplied drive-though arch for spraying asphalt release agent onto truck beds. This system uses an electric pump to draw ready-to-use chemical solution from the included 20 Gallon Level Master™ tank, which maintains a constant supply of solution. When the system is activated, a delay timer allows the driver to position the truck under the spray nozzle before applying release agent. When run time expires, the system shuts down and resets.

Key Features

- Designed to spray asphalt release chemicals on to truck beds from a nozzle that attaches to an existing drive-through spray bar
- The electric pump draws ready-to-use chemical solution from the 20 Gallon Level Master™ which automatically maintains a constant supply of solution
- The push button activated, adjustable, single-shot timer will delay for up to 60 seconds, allowing the driver to get in position, and then apply chemical for up to 60 seconds before shutting off
- The driver remains in his cab and avoids the risk of slip-and-fall injury and chemical waste
- Evenly coats the truck bed in just seconds, reducing run-off and chemical waste
- The Level Master™ achieves a wide range of dilution ratios using city water pressure and precision metering tips
- Chemical resistant wetted components ensure years of outstanding performance with minimal maintenance
- See other Lafferty asphalt release equipment and industrial chemical applicators in Catalog 8

Includes

- Lockable, stainless steel pump enclosure
- 110V stainless steel electric pump
- Control box with delay/run timers & remote push button
- 20 Gallon Level Master™ system
- 40' discharge hose with custom fan spray nozzle

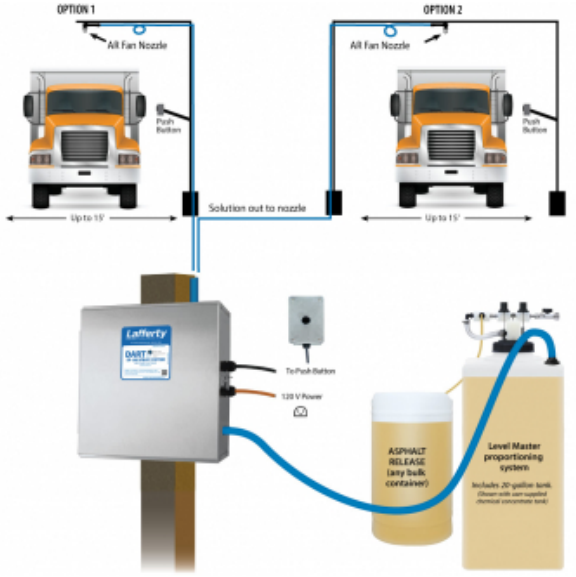

DART™ DRIVE THRU ASPHALT RELEASE, TIMED

OPTIONS

Drum & Tote Stick Lengths & Seal Materials

Drum Stick, 33" (Viton or EPDM)	# 491643 / 491643-E
Drum Stick, 48" (Viton or EPDM)	# 491648 / 491648-E
Drum Stick, 54" (Viton or EPDM)	# 491645 / 491645-E
Tote Stick, 33" (Viton or EPDM)	# 491653 / 491653-E
Tote Stick, 48" (Viton or EPDM)	# 491654 / 491654-E
Tote Stick, 54" (Viton or EPDM)	# 491656 / 491656-E



Asphalt Release Spray Nozzle Assembly

Provides a coarse, wide fan spray pattern for quick, complete coverage.

REQUIREMENTS

Chemical Concentrate

Water

Temperature	up to 160°F
Pressure	35 to 125 PSI
Supply Line	1/2"
Hose	3/4" ID x 40'
Nozzle	#180193SS
Electric	120V / 20A

See Separate Instructions for:

Level Master™	989304

Lafferty EQUIPMENT MANUFACTURING LLC
CFS TECHNOLOGIES
1.501.851.2820 | 1.800.999.2820
www.laffertyequipment.com